



4.5kW WATER COOLED SPLIT SYSTEM



CODE: 1POR-2008



ACCESSORIES



DISTRIBUTION BOARDS



SINGLE PHASE EXTENSION LEADS



SINGLE LANE CABLE CROSSOVER

This water cooled air conditioner is designed to withstand the rigours and wear and tear of hire yet aesthetically pleasing and quiet in operation. Offering true air conditioning without the exhaust air gains associated with monoblock units. There's no need for exhaust ducting to be connected to an outside area. Unit sits on non marking castors for ease of mobility and has two speed fan and adjustable outlet grille.

PRODUCT SPECIFICATIONS

POWER REQUIREMENTS		EQUIPMENT TYPE		PHYSICAL INFORMATION	
Running Current* (Amps)	7.3	Portable water cooled air conditioner		INDOOR UNIT	
Rated Current (Amps)	10	TECHNICAL INFORMATION		Height (mm)	954
Hertz	50			Total cooling capacity (kW)	4.5
AREA OF USE		Air Flow High/low (l/s)	208 / 150	Depth (mm)	330
Industrial		Power consumption (kW)	1.8	Weight (kg)	105
Commercial		Refrigerant	R407C / R22	OUTDOOR UNIT	
Manufacturing		Noise Level @ 3m (dBA)	54	Height (mm)	505
Emergency		Defrost	Hol gas bypass	Width (mm)	200
		Operating Range (°C)	0-37	Depth (mm)	500
		Drainage	Fully pumped with 30m head and high level alarm	Weight (kg)	22

* 25°C / 60%RH

*Product models may vary from picture shown

F 1300 487 247
E info@aircon.com.au

www.aircon.com.au



1800 626 996

Cooling Chillers Reverse Cycle Heating Refrigeration Dehumidification Ventilation Power

SYDNEY | MELBOURNE | BRISBANE | PERTH | ADELAIDE | HOBART | CANBERRA



PERFORMANCE DATA

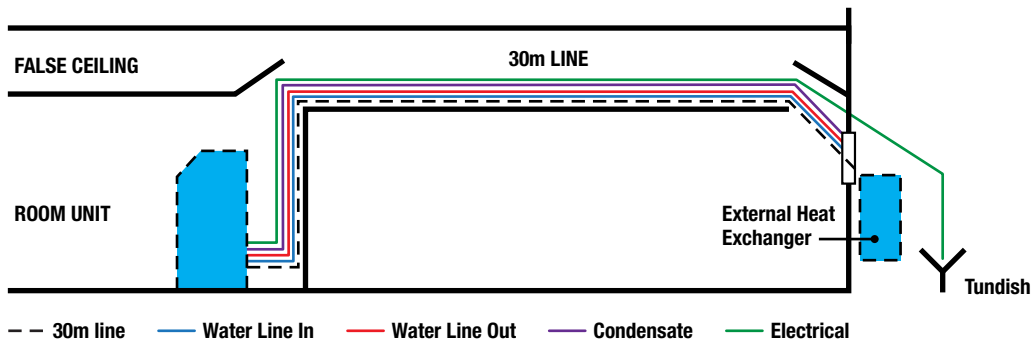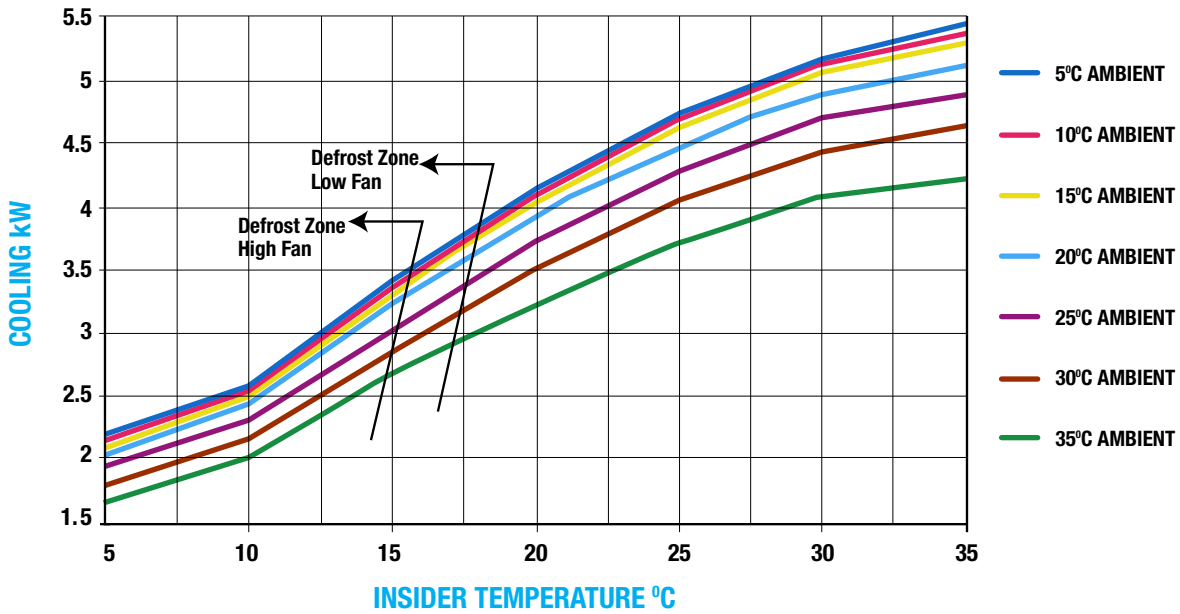

By joining 6 flexible line of 5m, it is possible to install the external heat exchanger more than 25 metres from the area cooled by the room unit. The lines may run in a false ceiling, false floor or along a carpet. The flexible line will pass through a hole in the wall or ceiling of 5cm x 8cm if required. The external heat exchanger is supplied with hanging chains.

- Standard water lines are 5 meters long
- Water lines available up to 15 metres long
- Water lines include quick connect couplings as a standard

F 1300 487 247
E info@aircon.com.au

www.aircon.com.au

1800 626 996